



WIRE HARNESS TAPING



Manual wire harness taping tool



## WIRE HARNESS TAPING TECHNOLOGY

### PROTECTION FROM ABRASION, HEAT, MOISTURE AND CHEMICALS

Wire harness taping tool, compared with hand wiring, has many times greater performance with consistent results. The process is convenient and not physically demanding. Operator places the harness into the grabbing area of the tool and then moves the tool in an up-and-down circular motion.

### Manual taping advantages



#### Cost-effective

Cheaper than semi or fully automatic tabletop machines. It doesn't require any special servicing.



#### Suitable for small areas

Applicable even for taping small sections of complex harnesses on the wire harness assembly board.



#### Easy to handle

Requires only few repetitive motions to perform taping.



#### Quickness


Unlike a fully manual method, hand taper offers fast alternative with consistent and qualitative results.

## WIRE HARNESS TAPING TOOL

SM Contact presents its novel solution for wrapping wires with insulating tape – manual wire harness taper TapiX. This tool substitutes hand winding and ensures significantly quicker and more qualitative insulation.

- ✓ Convenient tape cutting
- ✓ Trigger for an easy rotation braking
- ✓ Light-weight
- ✓ Simple and convenient operation
- ✓ Speed and quality
- ✓ Easy interchangeable tape roll
- ✓ Ergonomic structure
- ✓ Aesthetic qualities

### Operation principle

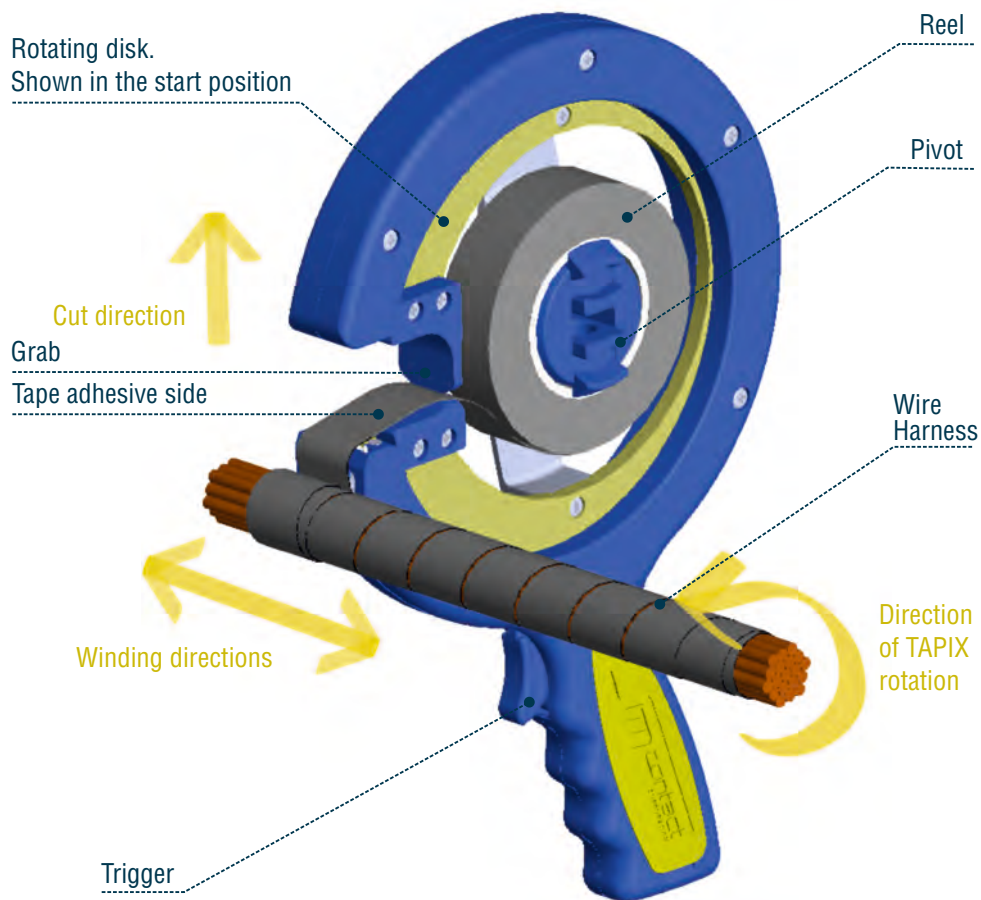

## TapiX


### Technical characteristics

Tape	<b>PVC 15 / PVC 19</b>
Max. tool outer Ø	<b>90 mm</b>
Tape inside Ø	<b>38 mm</b>
Wire harness Ø	<b>3 - 23 mm</b>
Recommended distance from wire harness to work table	<b>130 mm</b>
Dimensions (W x D x H)	<b>246 x 158 x 32 mm</b>
Weight	<b>0.35 kg</b>



## Options

### Handle engraving



It is possible to engrave the logo of your company, TapiX user's name or any other important information on the handle of the wire harness taper. It is also possible to place Braille text.

### Customized printing




You can send us the image of your preference. It will be printed on the TapiX surface on both sides of the tool.



## CONTACTS

### SM CONTACT FRANCE

Headquarters est. 1986  
+33 (0)1 64 63 66 66  
Fax +33 (0)1 64 63 67 22  
smcontact@smcontact.eu  
20-22 voie Gallo Romaine  
77860 Quincy-Voisins, France



FRANCE

### SM CONTACT ASIA


Asian subsidiary est. 2008  
+86 (0)20 2288 3182  
info@smcontact.cn  
205 Exchange Center, Tian An Hi-  
tech Ecological park, 555, Panyu RD  
Guangzhou, China



ASIA

### SM CONTACT ENGINEERING

Russian & CIS subsidiary est. 2011  
+7 812 980 97 93  
info@smcontact.ru  
21 lit. A Basseynaya Street  
196191 Saint Petersburg, Russia



RUSSIA

### SM CONTACT GMBH

German subsidiary est. 2015  
+49 89 693 30 380  
sales\_de@smcontact.eu  
Haidgraben 2  
D-85521 Ottobrunn, Germany



GERMANY

### SM CONTACT SPAIN

Spanish subsidiary est. 2017  
+34 645 22 62 37  
smcontact@smcontact.eu  
Carrer de Vilafranca 7  
08024 Barcelona, Spain



SPAIN

### SM CONTACT TECH

Estonian subsidiary est. 2018  
+372 682 55 01  
info@smcontact.ee  
Aleksander Puškini Street 59  
20609 Narva, Estonia



ESTONIA

Download this brochure



Learn more about TapiX



SMCONTACT.EU

